


**Tree protection plan**  
Location of trees, categorisation & protection/management proposals

Ericombe, Butts Green, Lockerley, Romsey, Hampshire  
Barrell Plan Ref: 19263-5



- BS category B Trees of moderate quality
- BS category C Trees of low quality
- Trees to be removed
- Proposed layout
- Estimated tree positions not included on original land survey and/or adjusted crown spreads
- Protective barrier/fencing
- Construction exclusion zone (CEZ)
- Precautionary areas
- Root protection area (RPA) boundaries for category B trees
- Root protection area (RPA) boundaries for category C trees

Permission is granted to scale from this drawing for Local Authority Planning Approval purposes relating to tree protection measures only. Where applicable this drawing is to be read in conjunction with the site plan and the copyright of Barrell Tree Consultancy 2021. ©  
This drawing to be reproduced in colour only.  
[www.barrelltreecare.co.uk](http://www.barrelltreecare.co.uk)

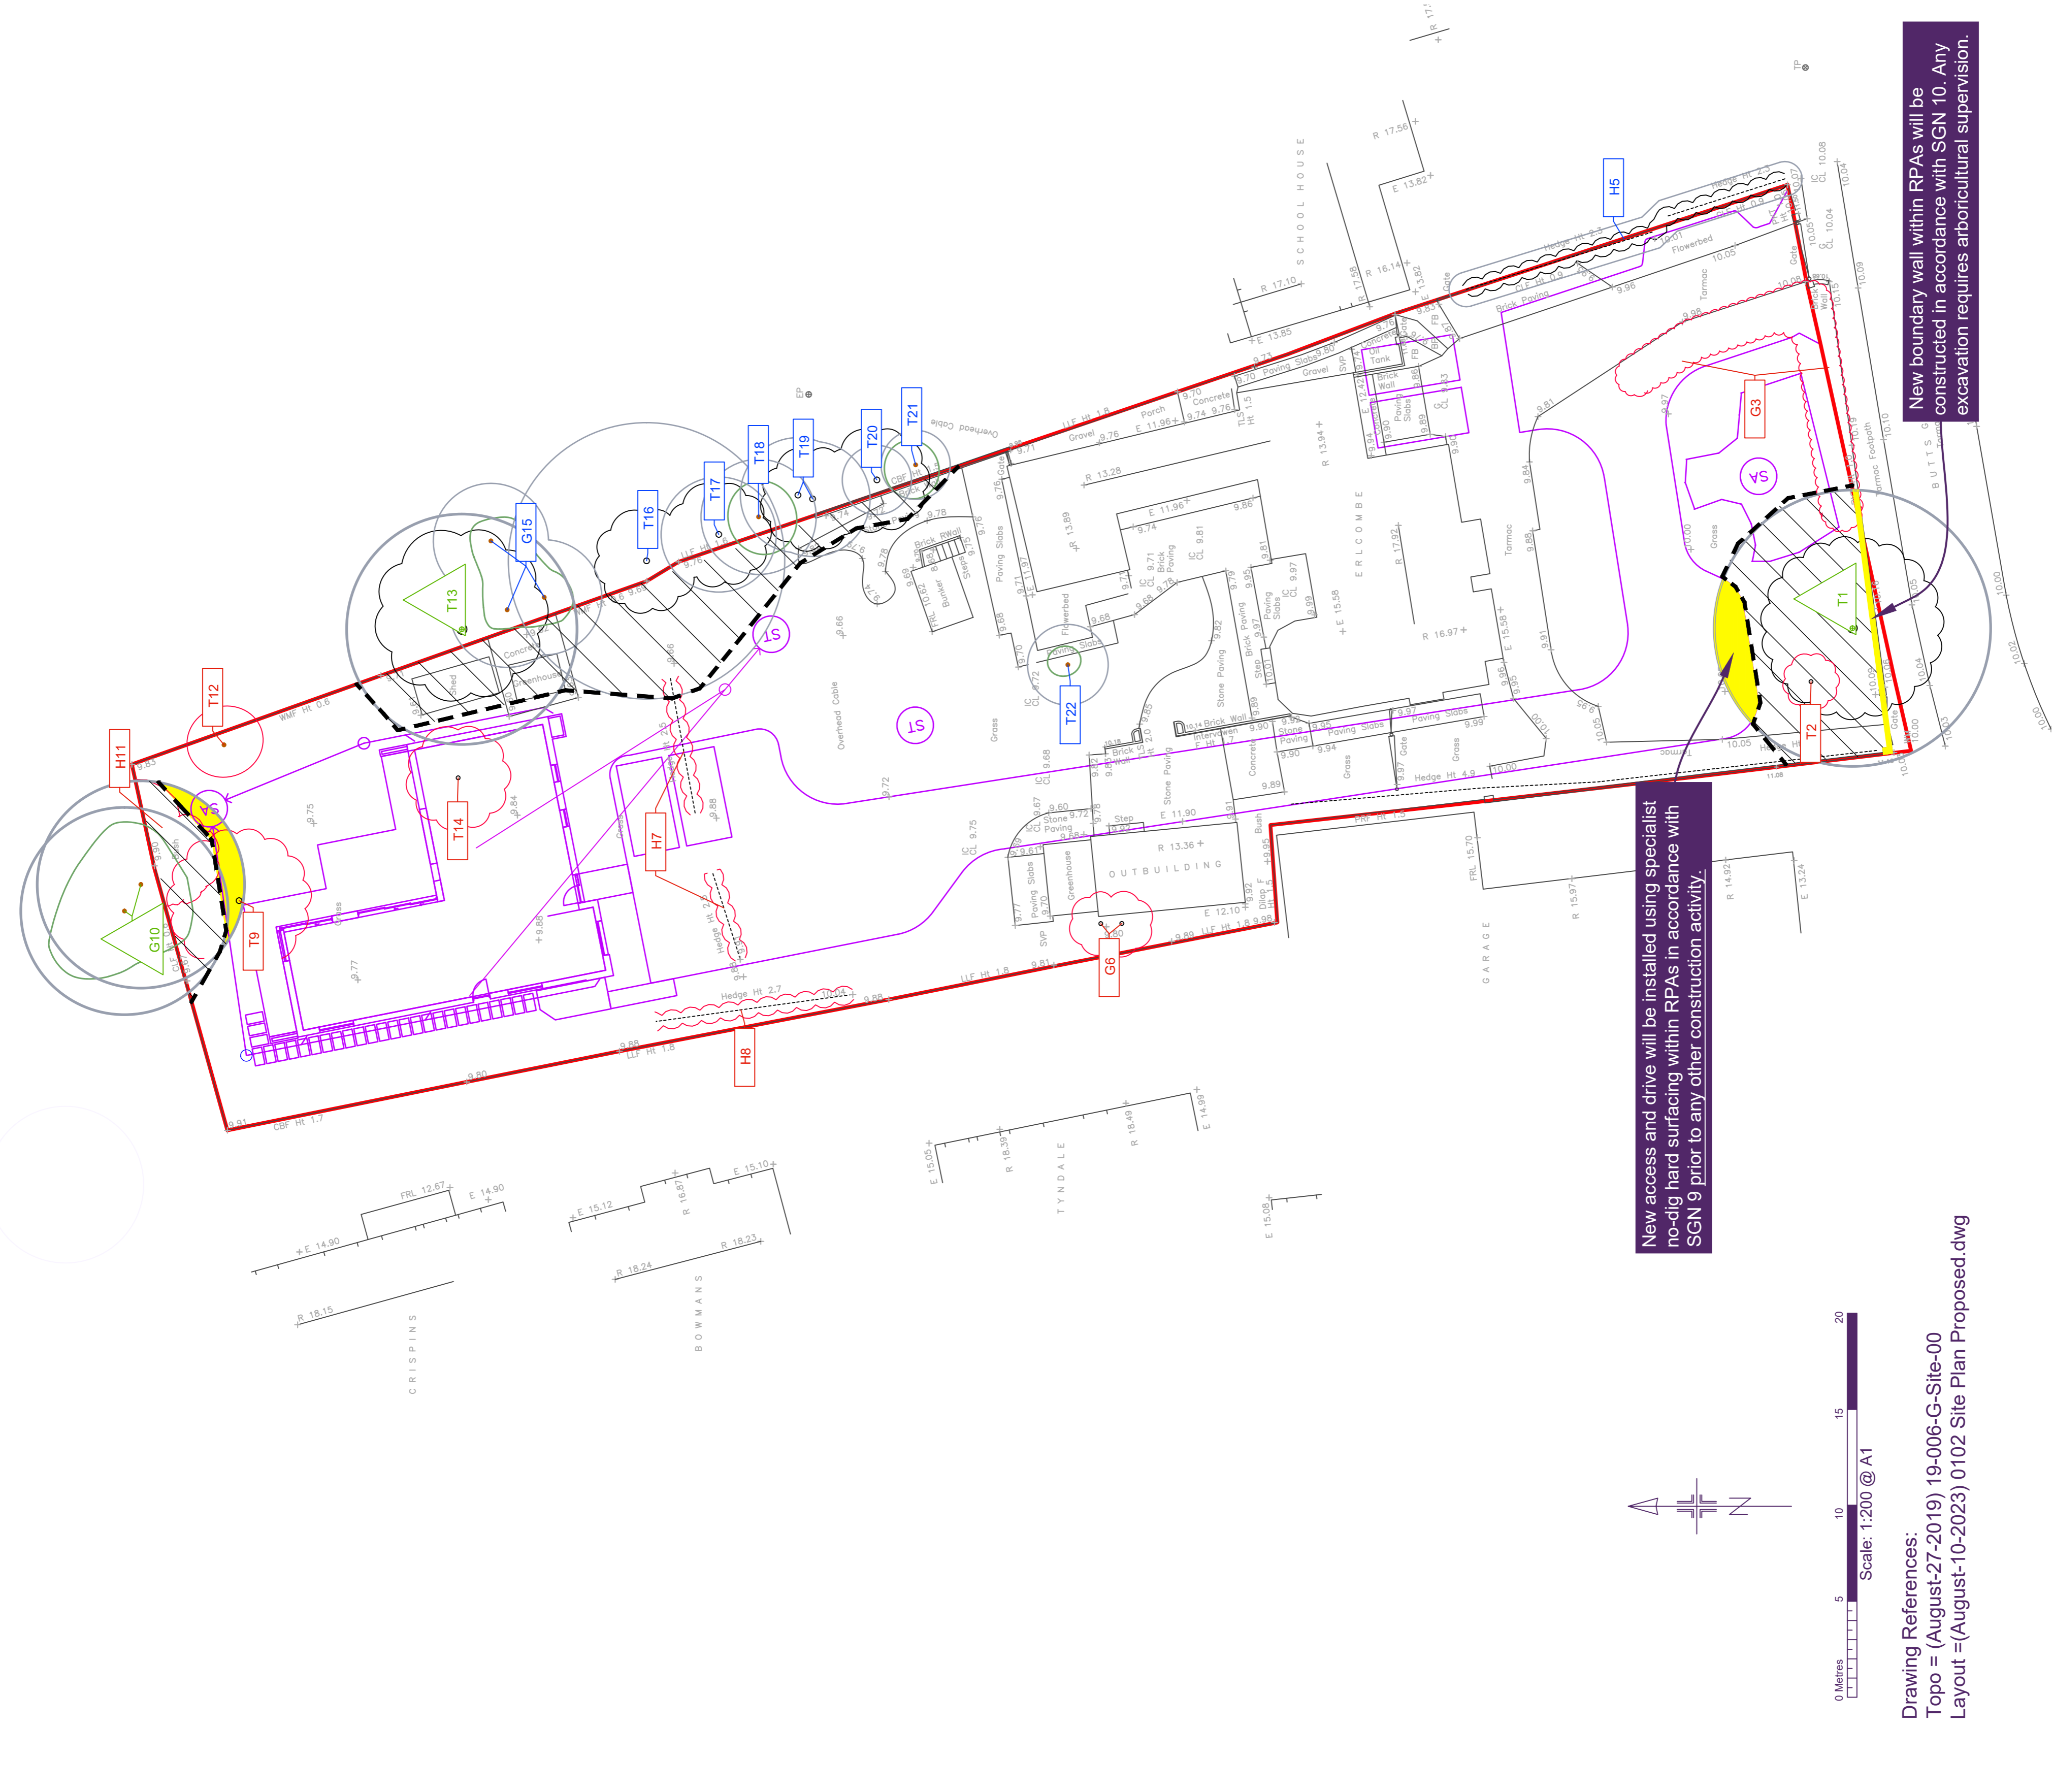

New access and drive will be installed using specialist no-dig hard surfacing within RPAs in accordance with SGN 9 prior to any other construction activity.

New boundary wall within RPAs will be constructed in accordance with SGN 10. Any excavation requires arboricultural supervision.

Tree No	Species	Category	RPA Radius	Tree Works
All retained trees & hedges				Carry out safety check and lift over site to 3-4 m as necessary.
T1	Cedar	B	7.2	-
T2	Cypress	C	3.0	Fell for development
G3	Holly, liliac, mixed shrubs	C	1.8	Fell for development
H5	Beech	C	0.9	-
G6	Cypress	C	3.3	Fell for development
H7	Beech	C	1.8	Fell for development
H8	Laurel	C	1.8	Fell for development
T9	Walnut	C	3.6	Fell for development
G10	Ash, oak	B	5.4	-
H11	Laurel	C	1.8	Fell for development
T12	Hawthorn	C	2.1	Fell for development
T13	Norway maple	B	6.0	-
T14	Apple	C	2.1	Fell for development
G15	Norway maple	C	3.0	-
T16	Cypress	C	7.2	-
T17	Maple	C	3.0	-
T18	Maple	C	3.0	-
T19	Maple	C	3.0	-
T20	Apple	C	1.8	-
T21	Privet	C	1.8	-
T22	Cypress	C	2.1	-

**SGN 7 Excavating in RPAs**

**Always:**

- use the tree consultant to supervise work in RPAs
- use hand tools to dig in RPAs
- protect exposed roots from sunlight and drying out

**SGN 9 Installing/upgrading surfacing in RPAs**

**Always:**

- use the tree consultant to supervise work in RPAs
- minimise damage to roots and disturbance to soil in RPAs
- minimise excavation when installing or upgrading surfacing in RPAs

**SGN 10 Installing structures in RPAs**

**Always:**

- use the tree consultant to supervise work in RPAs
- hand-dig pile, pad, or post locations down to at least 60cm
- protect RPAs from contamination from poured wet concrete

**SGN 11 Installing services in RPAs**

**Always:**

- use the tree consultant to supervise work in RPAs
- select the least damaging option when installing services, so prioritise trenchless, over broken trench over continuous trench
- hand-dig trenches if trenchless is not feasible

**SGN 12 Landscaping in RPAs**

**Always:**

- use the tree consultant to supervise work in RPAs
- avoid raising ground levels within 1m of the trunks of retained trees

**How to use plan**

More detailed guidance on each Site Guidance Note (SGN) can be found in a printed hard copy compilation of all the SGNs, **Manual for Managing Trees On Development Sites version 2.1**, issued to the Site Manager at the pre-commencement site meeting (Note: This should be retained on site throughout the duration of works). Additionally, an electronic pdf compilation of all the SGNs, was submitted with this drawing to the local planning authority and the client. Alternatively, a pdf of each SGN can be downloaded by:

- clicking the image links in the electronic pdf version of this plan;
- holding a mobile phone QR (Quick Response) code reader over the QR code in the paper version of this plan, or,
- visiting our website at <https://www.barrelltreecare.co.uk/resources/technical-guidance>

Drawing References:  
Topo = (August-27-2019) 19-006-G-Site-00  
Layout = (August-10-2023) 0102 Site Plan Proposed.dwg